

## Dielectric Grease, 10 Wt Oz

No. 02083 | Item# 1003197 | Case# 1003196

Product Description	Non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Waterproofs electrical connections and components. Improves electrical performance in adverse weather conditions.
Applications	Electrical panels, outdoor lighting, scoreboards, traffic lights, high voltage poles, transformers, disconnects, switching mechanisms, electrical contacts, spark plugs, battery terminals, fasteners, o-rings, rubber and plastic parts.
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	Non-Curing Silicone Compound for Sealing, Lubricating, Protecting, And Insulating Electrical Components
Net Fill	10 Wt Oz
UPC Code	078254020839
Unit Dimensions	7.75H x 2.63W x 2.63D in
Units Per Case	12
Case Dimensions	8.1H x 8.3W x 11.1D in
Cases Per Pallet	133
Case Weight	11 lbs
I 2 of 5 Code	30078254020830
Appearance	Translucent to Opaque Gel Paste
Base Type	Silicone
Flash point (F)	<20°F
Flash point (C)	<-7°C
Flammability Class - CPSC	Extremely Flammable
Spec Gravity Concentrate	0.646
Plastic Safe	Not Plastic Safe
Film Type	Non-Curing Silicone Paste
Evaporation Rate	Fast
Dielectric Strength	13,960 Volts

Last revised: 12/13/2019

Page 1 of 2




**Chemical Solutions to Keep You Moving™**

f t+ d+ in m • 800-272-8963 • [crcindustries.com](http://crcindustries.com)

CRC Industries, Inc. is a global leader in the production of specialty chemicals for maintenance, repair and operational professionals and do-it-yourselfers serving the automotive, industrial, electrical, marine, heavy truck, hardware and aviation markets. CRC trademarked brands include: CRC®, K&W®, Sta-Lube®, SmartWasher®, Marykate®, Weld-Aid®, Ambersil®, KF®, Kontakt Chemie®, Ados®, Action Can®, and Kitten®.

©2019 CRC Industries, Inc.

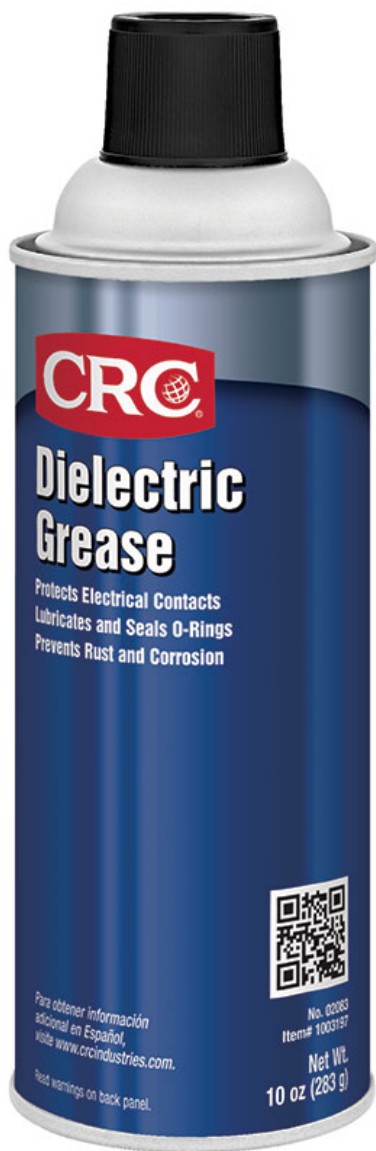

NLGI Grade	2
Working Temp (F)	-70 to 400°F
Working Temp (C)	-56.7 to 204.4°C
Propellant	Hydrocarbon
NSF Category Code	H1
NSF Number	130626
Military Specification Number	Meets requirements of Mil-S-8660 (DM-3), Meets requirements of Mil-C-21567A (DM-2)
Federal Specification Number	FDA-CFR-21-178.3570, FDA-CFR-21-175.300
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Consumer Product def)	90.15
VOC g/L (Consumer Product def)	582
VOC lbs/gal (Consumer Prod def)	4.85
VOC Category	Not Regulated
Restricted from Sale In:	No State Restrictions
Removal (How To)	Remove with Petroleum Distillates.